

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:



CODICE
CR1014589

MODELLO
Q70BMV/E800

SERIE
QUEEN 7

GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs. As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Suitable for maintaining dishes at a temperature below 100° and for very delicate cooking.

Module of 40: Tank size 1xGN 1/1

Module of 80: Tank size 2xGN 1/1

Heated by armored heating elements placed externally to the tank.

Control thermostat.

Different GN tray combinations

Examples:

M40: 1xGN1/3 + 1xGN 1/1

M80: 2xGN1/3 + 2xGN 1/1

Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:



CODICE
CR1014589

MODELLO
Q70BMV/E800

SERIE
QUEEN 7

Technical Information

| SPECIFICATION | DATA |
|-----------------------|------------------------------------|
| MATERIAL | CR1014589 |
| DEFINITION | Q70BMV/E800 BAGNOMARIA EL. M80 A/G |
| COMMERCIAL LINE | QUEEN |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 700 mm |
| DIM. HEIGHT | 870 mm |
| NET WEIGHT | 52 Kg |
| VOLUME (net) | 0.487 |
| PACKAGE LENGTH | 840 mm |
| PACKAGE WIDTH | 850 mm |
| PACKAGING HEIGHT | 1170 mm |
| PACKAGE VOLUME | 0,836 m3 |
| GROSS PACKING WEIGHT | 65 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| FREQUENCY | 50-60 Hz |
| ELECTRICAL POWER | 5.4 kW |
| IP GRADE | IPX4 |
| CERTIFIED MODEL | Q70BMV/E800 |

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
 Rev.:
 Zone:
 Location:




CODICE
CR1014589

MODELLO
Q70BMV/E800

SERIE
QUEEN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
 MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

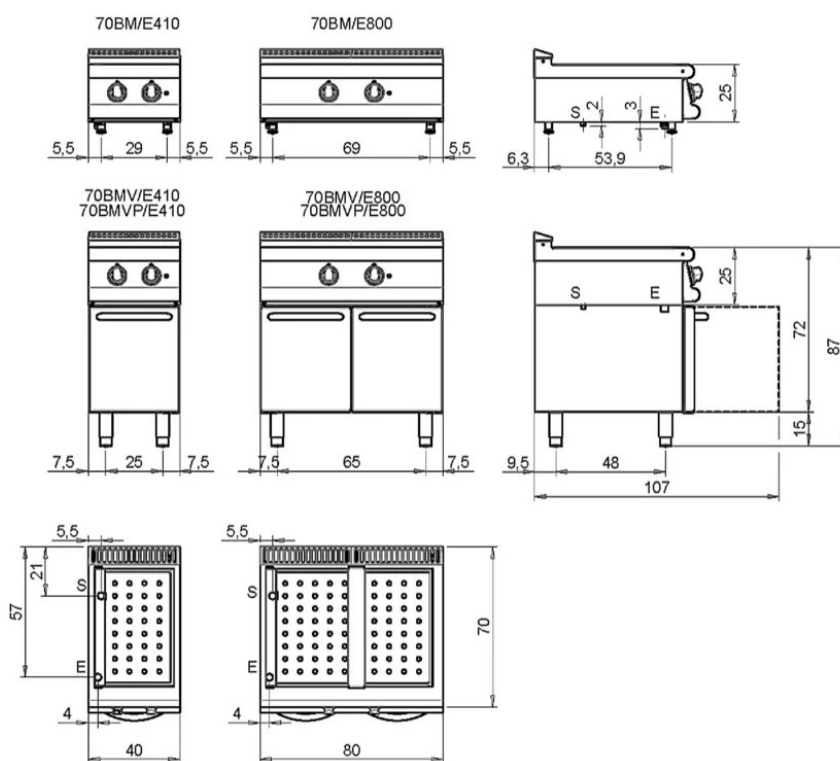

| Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda | |
|--|---|
| <p>E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico</p> <p>S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1 R 1/2</p> <p>S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba</p> <p>S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão</p> <p>S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto</p> <p>S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno</p> | <p>G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás</p> <p>H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água</p> <p>A1 = Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno</p> <p>A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio</p> <p>L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel</p> |

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:




CODICE
CR1014589

MODELLO
Q70BMV/E800

SERIE
QUEEN 7

PRODUCT'S RANGE PLUS



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Integrated water dispenser in tank



Different GN basin combinations
Examples:
M40: 1xGN 1/1 or 3xGN1/3
M80: 3xGN1/3 + 1xGN 1/